



فرست اوتوماشن

Enclosures

Series CZ0240 /9



Product Features

- Built-in Ex components are optional according to requirement (control switch, indicator, switch button, ammeter and voltmeter etc.)
- Degree of protection IP66.
- IECEx International Certification, ATEX European Approval.

Product Parameter

Product type:	CZ0240/9 The enclosure of panel mounting
Certification:	CCC IECEX ATEX
Application range (zones):	2G/Gb/zone 1; 2D/Db/zone 21
Min.ambient temperature:	-40°C
Max.ambient temperature:	+55°C
Degree of protection:	IP66
Terminals:	2×2.5mm ²
PE terminals:	4mm ²
Material of enclosure:	Alloy plastic of static resistance
Cable entry:	Molded plastic 1×M20, cable outer diameter Φ 5.5 ~ 13mm (Standard configure) .






فرست اوتوماشن

Enclosures

Series CZ0240 /9

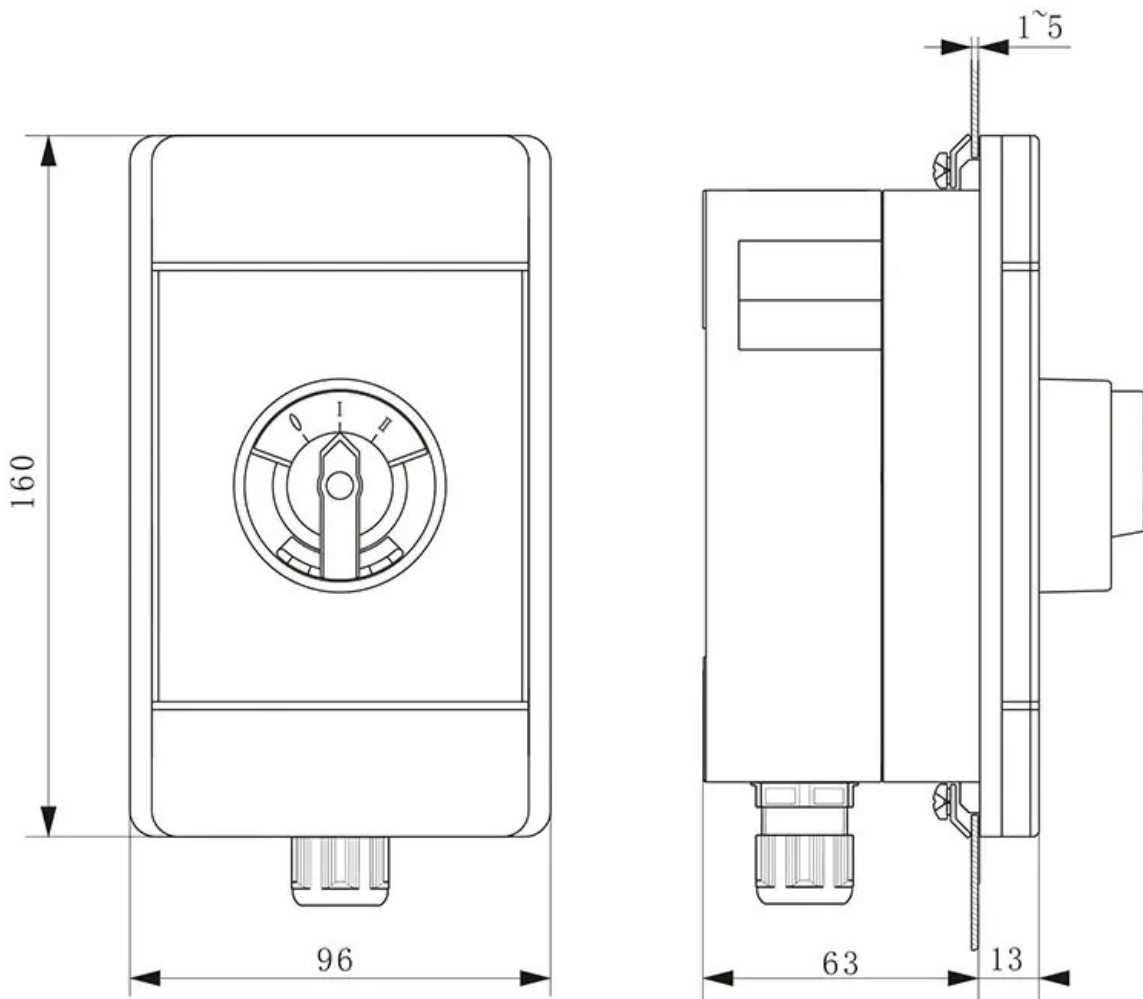

Contact


info@first-automation.com.eg/ • 01101619222 – 01100200886 • <https://first-automation.com.eg/>



فرست اوتوماشن

Enclosures

Series CZ0240/9

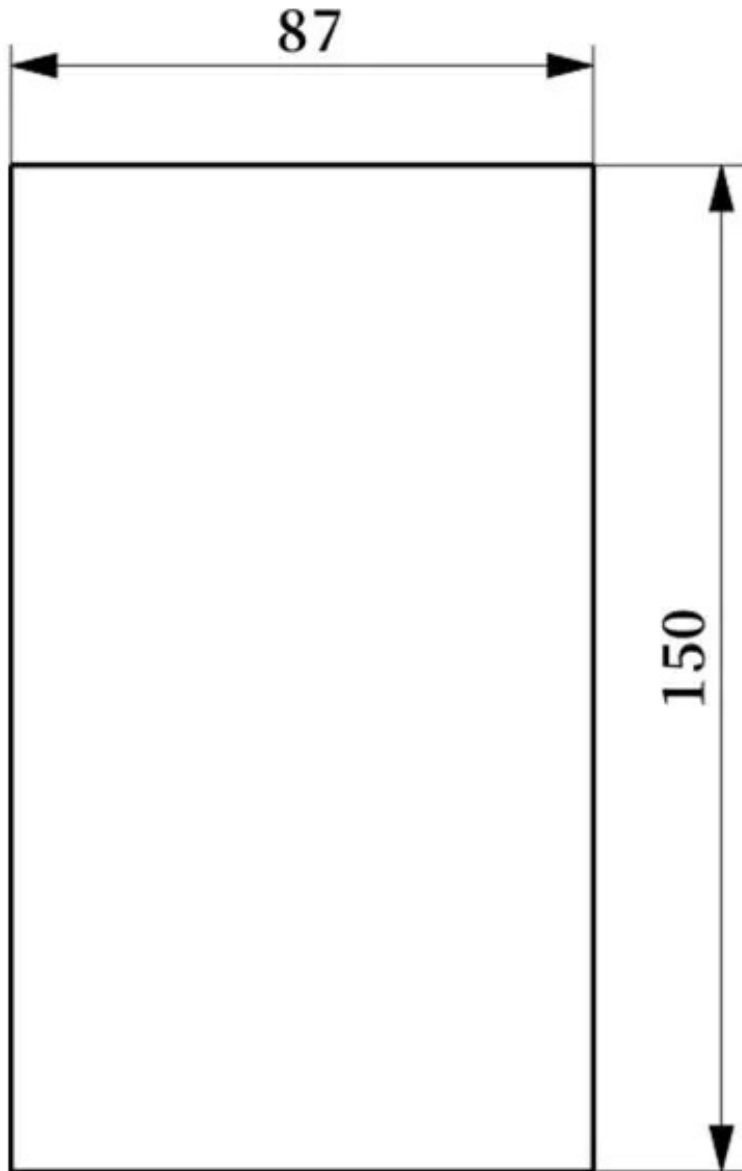

开孔尺寸

Aperture dimensions



فرست اوتوماشن

Enclosures

Series CZ0240/9



图 样	订购号
	CZ0240/9-01
	CZ0240/9-02